

7MBP200RA060

IGBT-IPM R series

600V / 200A 7 in one-package

■ Features

- Temperature protection provided by directly detecting the junction temperature of the IGBTs
- Low power loss and soft switching
- High performance and high reliability IGBT with overheating protection
- Higher reliability because of a big decrease in number of parts in built-in control circuit



■ Maximum ratings and characteristics

- Absolute maximum ratings(at $T_c=25^\circ\text{C}$ unless otherwise specified)

Item		Symbol	Rating		Unit
			Min.	Max.	
DC bus voltage		V _{DC}	0	450	V
DC bus voltage (surge)		V _{DC(surge)}	0	500	V
DC bus voltage (short operating)		V _{sc}	200	400	V
Collector-Emitter voltage		V _{CES}	0	600	V
DB Reverse voltage		V _R	-	600	V
INV	Collector current	DC	I _C	-	200 A
		1ms	I _{CP}	-	400 A
	Duty=57.8%	-I _C	-	200	A
DB	Collector power dissipation	One transistor	P _C	-	735 W
	Collector current	DC	I _C	-	75 A
		1ms	I _{CP}	-	150 A
	Forward current of Diode	I _F	-	75	A
Junction temperature	Collector power dissipation	One transistor	P _C	-	320 W
	Junction temperature	T _j	-	150	°C
Input voltage of power supply for Pre-Driver		V _{CC} *1	0	20	V
Input signal voltage		V _{in} *2	0	V _Z	V
Input signal current		I _{in}	-	1	mA
Alarm signal voltage		V _{ALM} *3	0	V _{CC}	V
Alarm signal current		I _{ALM} *4	-	15	mA
Storage temperature		T _{stg}	-40	125	°C
Operating case temperature		T _{op}	-20	100	°C
Isolating voltage (Case-Terminal)		V _{iso} *5	-	AC2.5	kV
Screw torque	Mounting (M5)		-	3.5 *6	N·m
	Terminal (M5)		-	3.5 *6	N·m

*1 Apply V_{CC} between terminal No. 3 and 1, 6 and 4, 9 and 7, 11 and 10.

*2 Apply V_{in} between terminal No. 2 and 1, 5 and 4, 8 and 7, 12,13,14,15 and 10.

*3 Apply V_{ALM} between terminal No. 16 and 10.

*4 Apply I_{ALM} to terminal No. 16.

*5 50Hz/60Hz sine wave 1 minute.

*6 Recommendable Value : 2.5 to 3.0 N·m

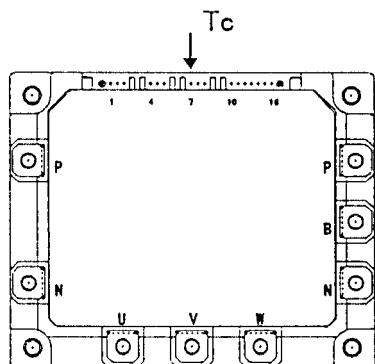


Fig.1 Measurement of case temperature

● Electrical characteristics of power circuit (at $T_c=T_j=25^\circ\text{C}$, $V_{CC}=15\text{V}$)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
INV	Collector current at off signal input	I _{CES}	$V_{CE}=600\text{V}$ input terminal open		-	-
	Collector-Emitter saturation voltage	V _{CE(sat)}	I _C =200A	-	-	2.8 V
	Forward voltage of FWD	V _F	-I _C =200A	-	-	3.0 V
DB	Collector current at off signal input	I _{CES}	$V_{CE}=600\text{V}$ input terminal open		-	-
	Collector-Emitter saturation voltage	V _{CE(sat)}	I _C =75A	-	-	2.8 V
	Forward voltage of Diode	V _F	-I _C =75A	-	-	3.3 V

● Electrical characteristics of control circuit(at $T_c=T_j=25^\circ\text{C}$, $V_{cc}=15\text{V}$)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Power supply current of P-line side Pre-driver(one unit)	I_{ccp}	$f_{sw}=0$ to 15kHz $T_c=-20$ to 100°C *7	6	-	32	mA
Power supply current of N-line side three Pre-driver	I_{ccn}	$f_{sw}=0$ to 15kHz $T_c=-20$ to 100°C *7	24	-	114	mA
Input signal threshold voltage (on/off)	$V_{in(th)}$	ON	1.00	1.35	1.70	V
		OFF	1.70	2.05	2.40	V
Input zener voltage	V_z	$R_{in}=20\text{k ohm}$	-	8.0	-	V
Over heating protection temperature level	T_{COH}	$V_{DC}=0\text{V}$, $I_c=0\text{A}$, Case temperature, Fig.1	110	-	125	°C
Hysteresis	T_{CH}		-	20	-	°C
IGBT chips over heating protection temperature level	T_{JOH}	surface of IGBT chips	150	-	-	°C
Hysteresis	T_{JH}		-	20	-	°C
Collector current protection level	INV	I_c $T_j=125^\circ\text{C}$ Collector current	300	-	-	A
	DB	I_c $T_j=125^\circ\text{C}$ Collector current	113	-	-	A
Over current protection delay time (Fig.2)	t_{DOC}	$T_j=25^\circ\text{C}$ Fig.2	-	10	-	μs
Under voltage protection level	V_{UV}		11.0	-	12.5	V
Hysteresis	V_H		0.2	-	-	V
Alarm signal hold time	t_{ALM}		1.5	2	-	ms
SC protection delay time	t_{SC}	$T_j=25^\circ\text{C}$ Fig.3	-	-	12	μs
Limiting resistor for alarm	R_{ALM}		1425	1500	1575	ohm

*7 Switching frequency of IPM

● Dynamic characteristics(at $T_c=T_j=125^\circ\text{C}$, $V_{cc}=15\text{V}$)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Switching time (IGBT)	t_{on}	$I_C=200\text{A}$, $V_{DC}=300\text{V}$	0.3	-	-	μs
	t_{off}		-	-	3.6	μs
Switching time (FWD)	t_{rr}	$I_F=200\text{A}$, $V_{DC}=300\text{V}$	-	-	0.4	μs

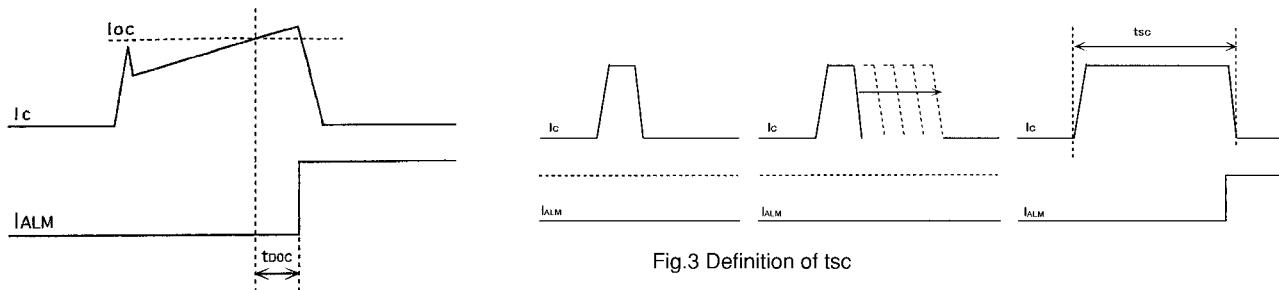


Fig.2 Definition of OC delay time

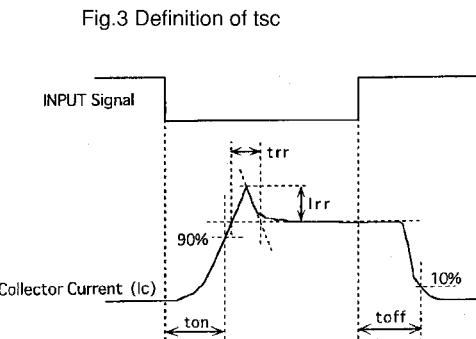


Fig.3 Definition of tsc


● Thermal characteristics($T_c=25^\circ\text{C}$)

Item	Symbol	Typ.	Max.	Unit
Junction to Case thermal resistance	INV	$R_{th(j-c)}$	-	0.17°C/W
	FWD	$R_{th(j-c)}$	-	0.36°C/W
	DB	$R_{th(j-c)}$	-	0.39°C/W
Case to fin thermal resistance with compound	$R_{th(c-f)}$	0.05	-	°C/W

● Recommendable value

Item	Symbol	Min.	Typ.	Max.	Unit
DC bus voltage	V_{DC}	200	-	400	V
Operating power supply voltage range of Pre-driver	V_{cc}	13.5	15	16.5	V
Switching frequency of IPM	f_{sw}	1	-	20	kHz
Screw torque	Mounting (M5)	-	2.5	-	N·m
	Terminal (M5)	-	2.5	-	N·m



■ Block diagram

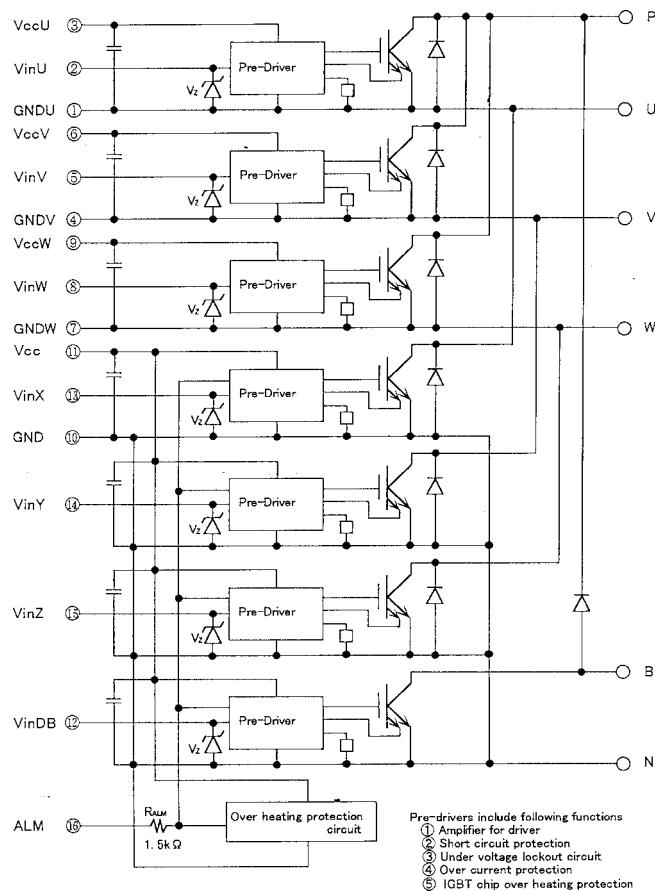

Pre-drivers include following functions

- a) Amplifier for driver
- b) Short circuit protection
- c) Undervoltage lockout circuit
- d) Over current protection
- e) IGBT chip over heating protection







■ Outline drawings, mm

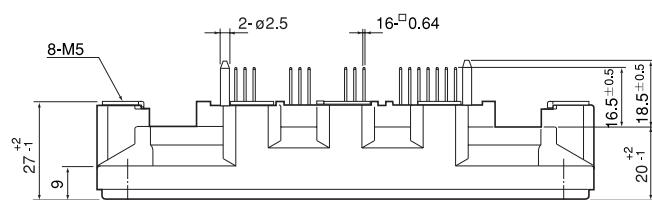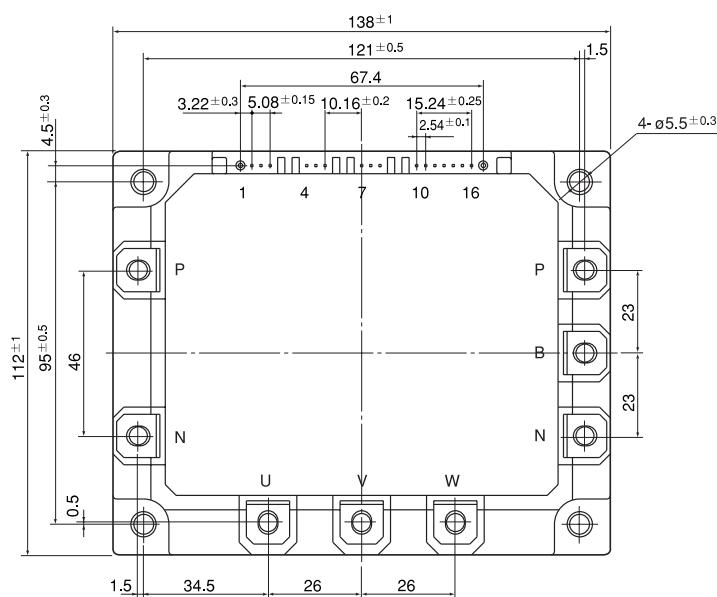







Mass : 920g







■ Characteristics (Representative)


● Control circuit

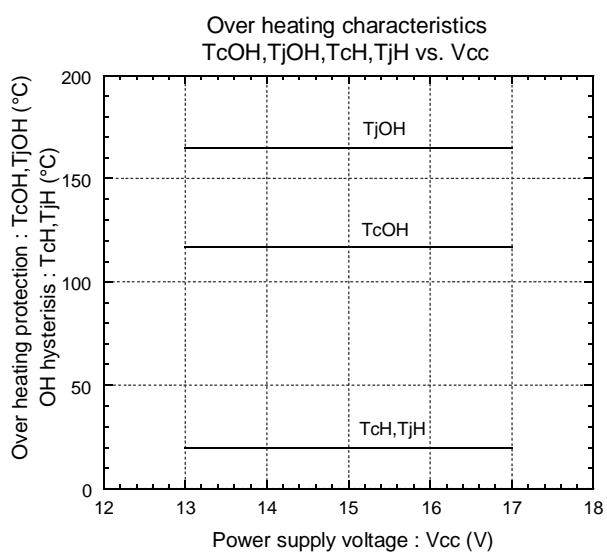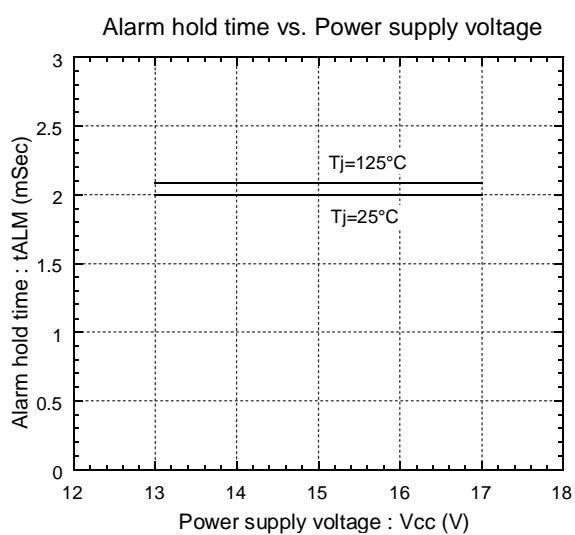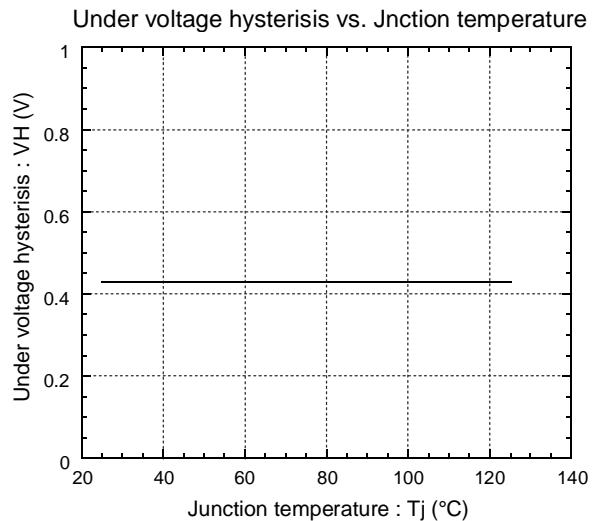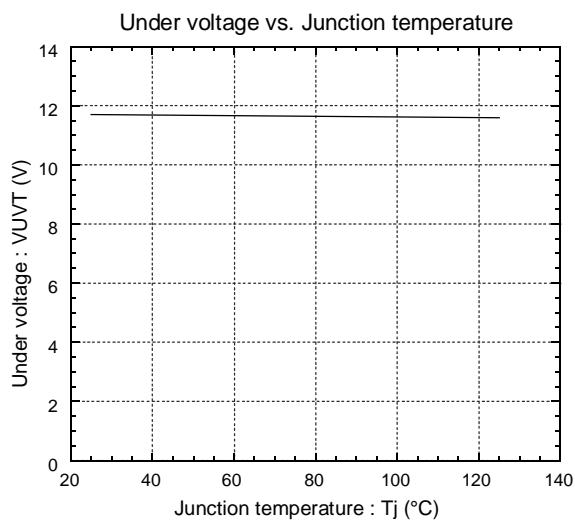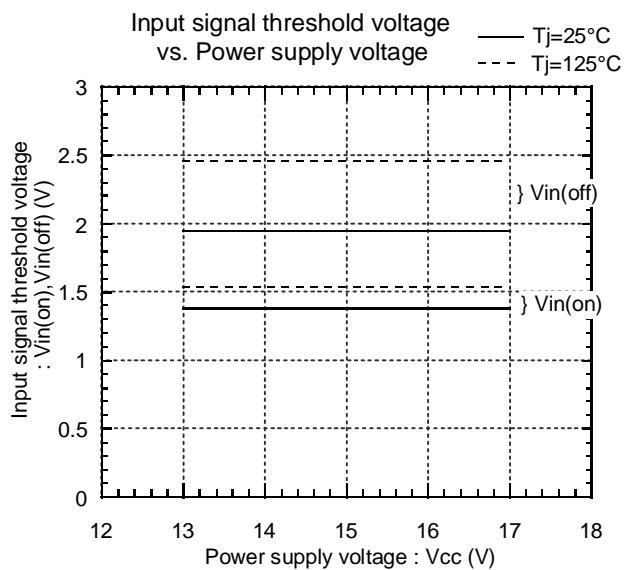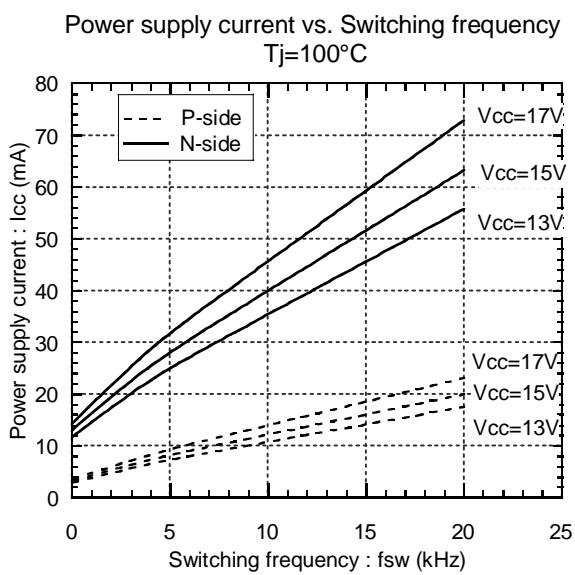

● Inverter

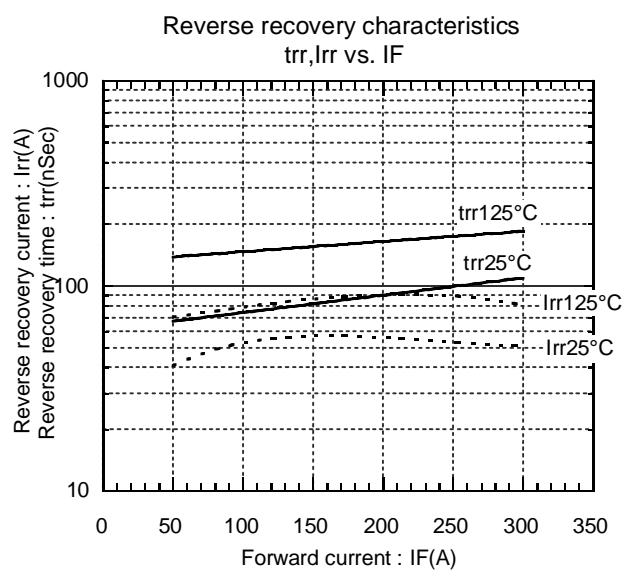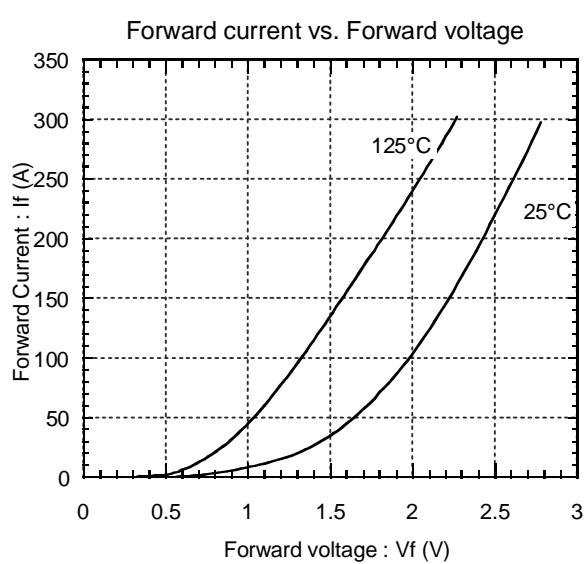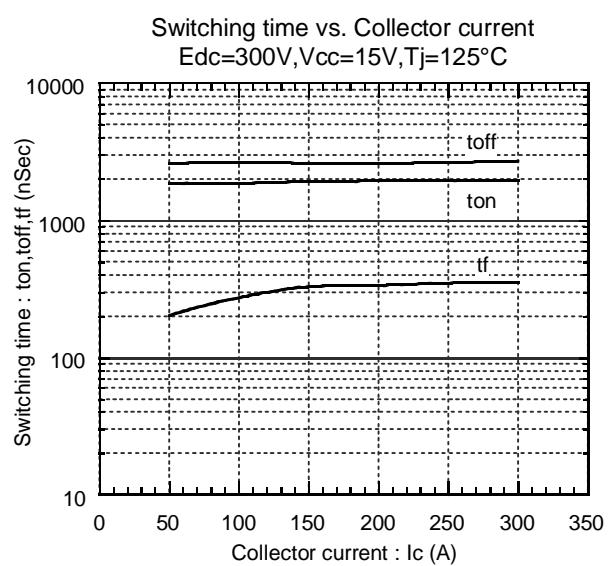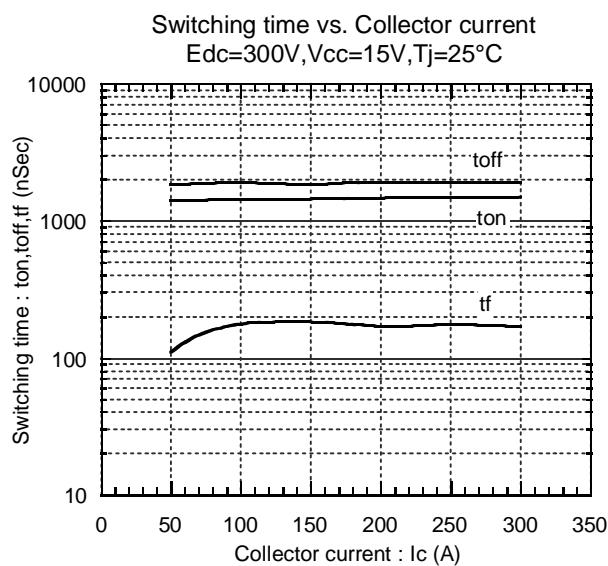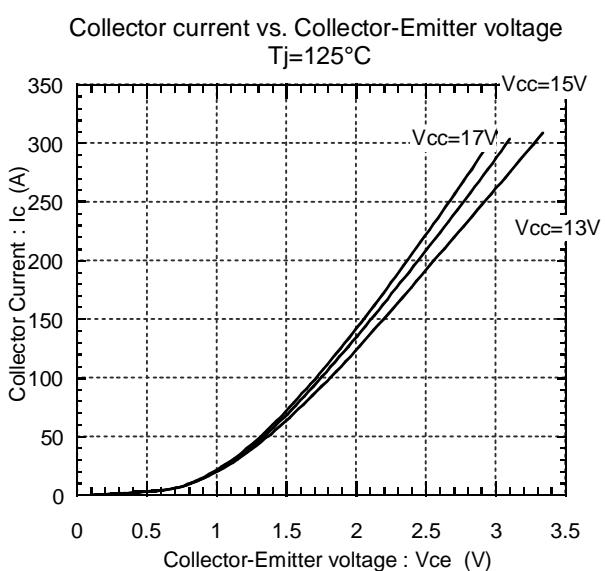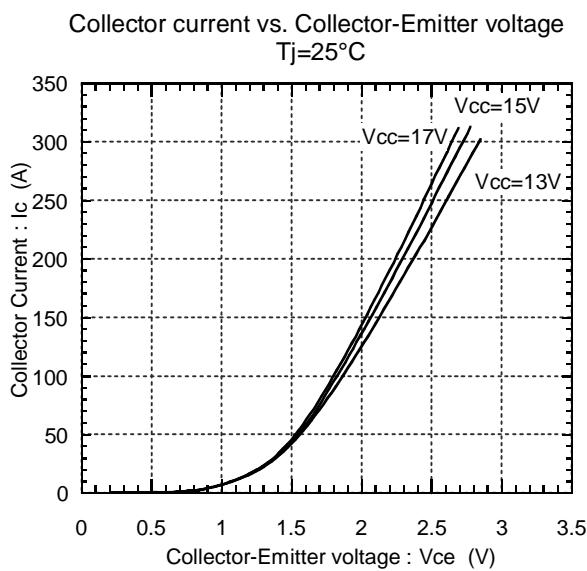

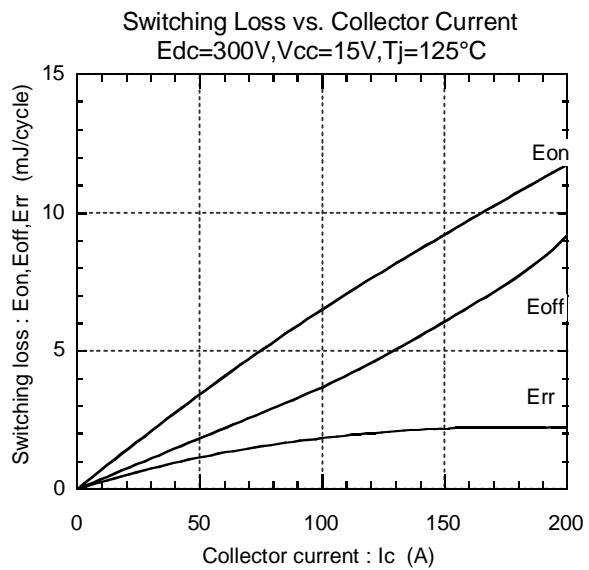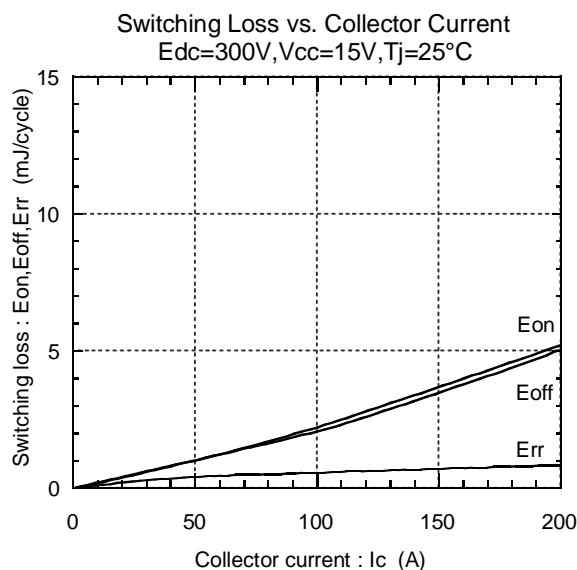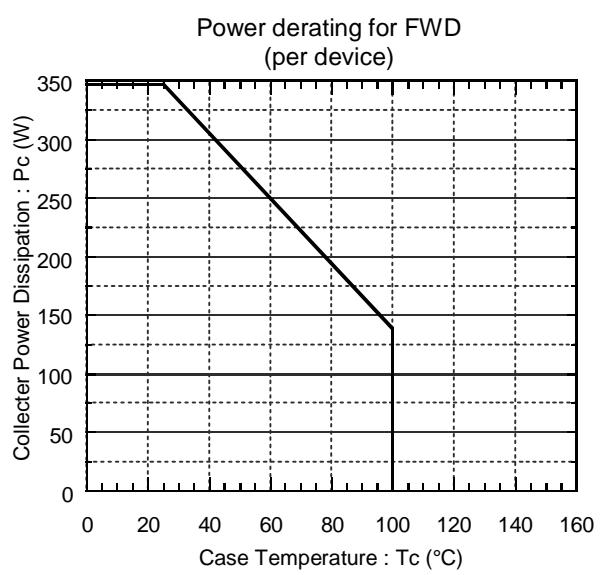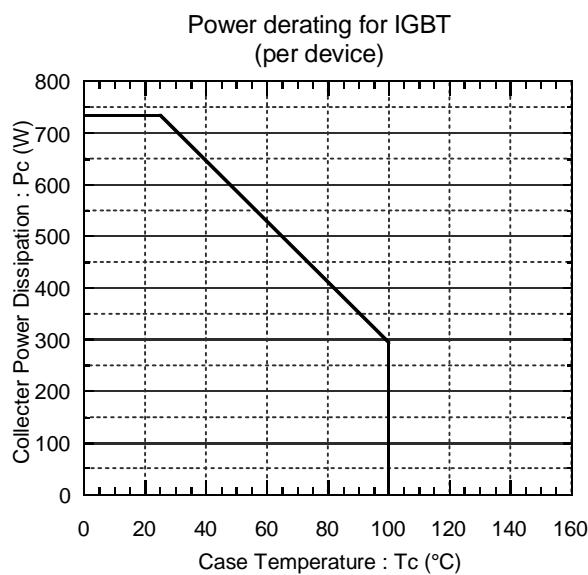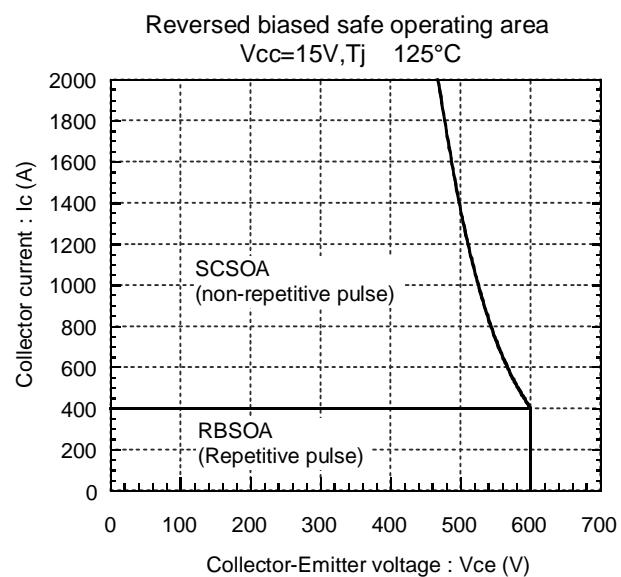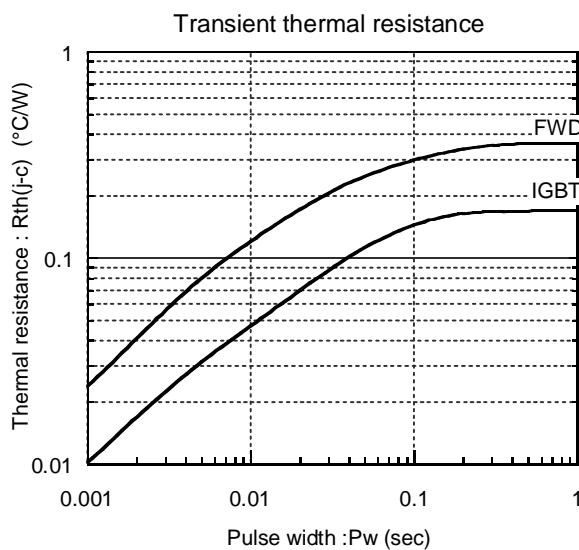

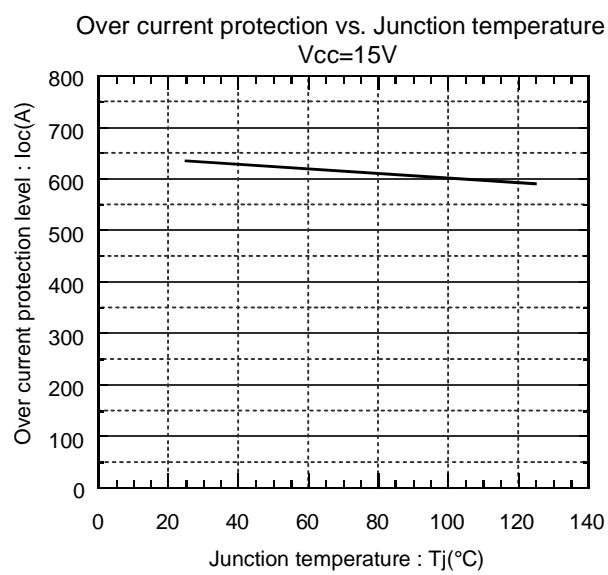

● Brake

