

Fast Recovery Epitaxial Diode (FRED)

DSEI 2x 30


DSEI 2x 31

I_{FAVM} = 2x 28 A


V_{RRM} = 1200 V

t_{rr} = 40 ns

V _{RSM}	V _{RRM}	Type
V	V	
1200	1200	DSEI 2x 30-12B DSEI 2x 31-12B



miniBLOC, SOT-227 B
E72873



Symbol	Test Conditions		Maximum Ratings (per diode)	
I _{FRMS}	T _{VJ} = T _{VJM}		70	A
I _{FAVM} ①	T _C = 50°C; rectangular, d = 0.5		28	A
I _{FRM}	t _p < 10 µs; rep. rating, pulse width limited by T _{VJM}		375	A
I _{FSM}	T _{VJ} = 45°C; t = 10 ms (50 Hz), sine		200	A
	t = 8.3 ms (60 Hz), sine		210	A
	T _{VJ} = 150°C; t = 10 ms (50 Hz), sine		185	A
	t = 8.3 ms (60 Hz), sine		195	A
I ² t	T _{VJ} = 45°C	t = 10 ms (50 Hz), sine	200	A ² s
		t = 8.3 ms (60 Hz), sine	180	A ² s
	T _{VJ} = 150°C; t = 10 ms (50 Hz), sine		170	A ² s
	t = 8.3 ms (60 Hz), sine		160	A ² s
T _{VJ}			-40...+150	°C
T _{VJM}			150	°C
T _{stg}			-40...+150	°C
P _{tot}	T _C = 25°C		100	W
V _{ISOL}	50/60 Hz, RMS		2500	V~
	I _{ISOL} ≤ 1 mA			
M _d	Mounting torque		1.5/13	Nm/lb.in.
	Terminal connection torque (M4)		1.5/13	Nm/lb.in.
Weight			30	g

Symbol	Test Conditions		Characteristic Values (per diode)	
			typ.	max.
I _R	T _{VJ} = 25°C	V _R = V _{RRM}	0.75	mA
	T _{VJ} = 25°C	V _R = 0.8 • V _{RRM}	0.25	mA
	T _{VJ} = 125°C	V _R = 0.8 • V _{RRM}	7	mA
V _F	I _F = 30 A;	T _{VJ} = 150°C	2.2	V
		T _{VJ} = 25°C	2.55	V
V _{To}	For power-loss calculations only		1.65	V
r _T	T _{VJ} = T _{VJM}		18.2	mΩ
R _{thJC}			0.05	K/W
R _{thCK}				K/W
t _{rr}	I _F = 1 A; -di/dt = 100 A/µs; V _R = 30 V; T _{VJ} = 25°C		40	60
I _{RM}	V _R = 540 V; I _F = 30 A; -di _F /dt = 240 A/µs	L ≤ 0.05 µH; T _{VJ} = 100°C	16	18
				A

① I_{FAVM} rating includes reverse blocking losses at T_{VJM}, V_R = 0.8 V_{RRM}, duty cycle d = 0.5

Data according to IEC 60747

IXYS reserves the right to change limits, test conditions and dimensions

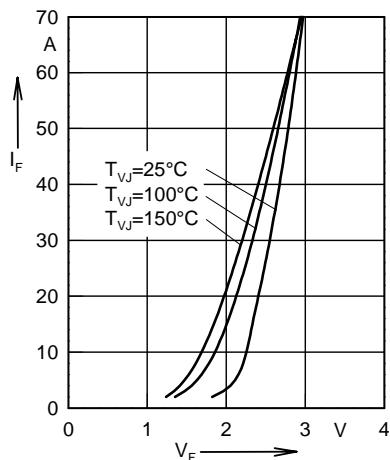


Fig. 1 Forward current versus voltage drop.

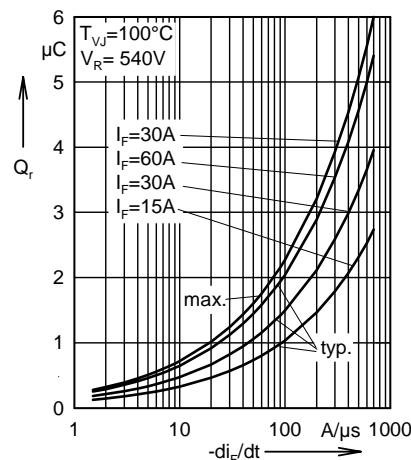


Fig. 2 Recovery charge versus $-di_F/dt$.

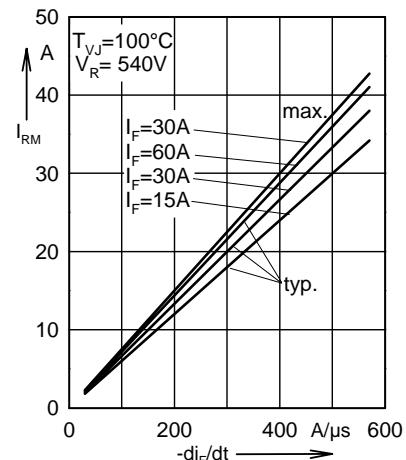


Fig. 3 Peak reverse current versus $-di_F/dt$.

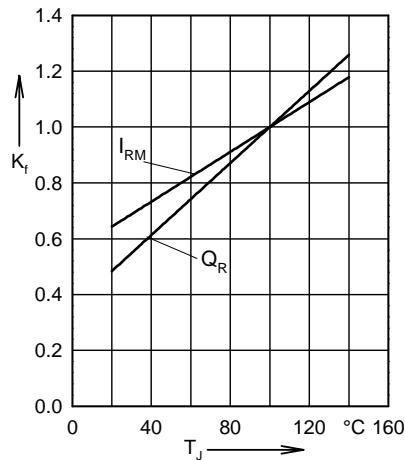


Fig. 4 Dynamic parameters versus junction temperature.

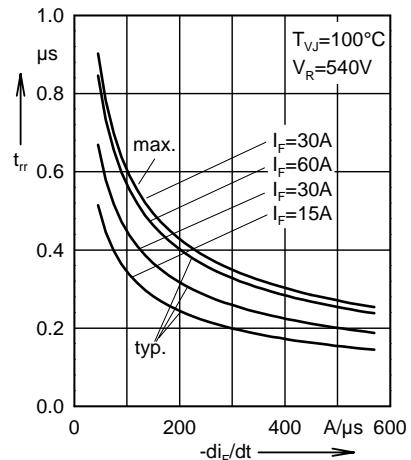


Fig. 5 Recovery time versus $-di_F/dt$.

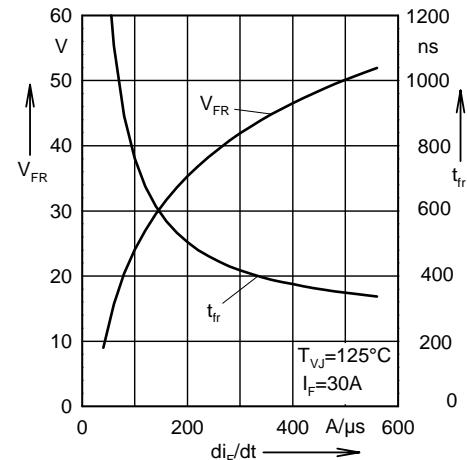


Fig. 6 Peak forward voltage versus di_F/dt .


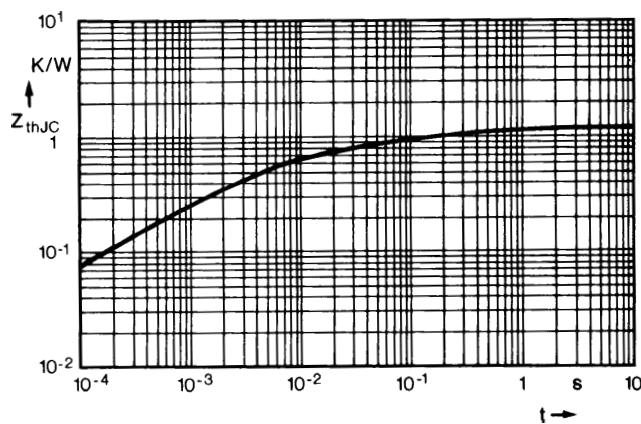


Fig. 7 Transient thermal impedance junction to case.

Dimensions



miniBLOC SOT-227 B
M4 screws (4x) supplied

Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	31.50	31.88	1.240	1.255
B	7.80	8.20	0.307	0.323
C	4.09	4.29	0.161	0.169
D	4.09	4.29	0.161	0.169
E	4.09	4.29	0.161	0.169
F	14.91	15.11	0.587	0.595
G	30.12	30.30	1.186	1.193
H	37.80	38.20	1.489	1.505
J	11.68	12.22	0.460	0.481
K	8.92	9.60	0.351	0.378
L	0.76	0.84	0.030	0.033
M	12.60	12.85	0.496	0.506
N	25.15	25.42	0.990	1.001
O	1.98	2.13	0.078	0.084
P	4.95	5.97	0.195	0.235
Q	26.54	26.90	1.045	1.059
R	3.94	4.42	0.155	0.174
S	4.72	4.85	0.186	0.191
T	24.59	25.07	0.968	0.987
U	-0.05	0.1	-0.002	0.004
V	3.30	4.57	0.130	0.180
W	0.780	0.830	19.81	21.08