

DIODE MODULE (F.R.D.)

FRS400CA120

UL:E76102(M)


FRS400CA120 is a high speed (fast recovery) isolated diode module designed for high power switching application. **FRS400CA120** is suitable for high frequency application requiring low loss and high speed control.

- High Speed $t_{rr} \leq 400\text{ns}$
- $I_F (\text{AV})$ 400A
- Isolated Mounting base.
- High Surge Capability

(Applications)

Inverter Welding Power Supply
Power Supply for Telecommunication
Various Switching Power Supply.

E o (CATHODE) → C o (ANODE)

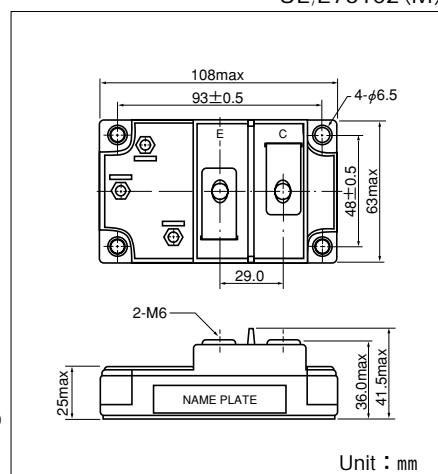

Unit : mm

($T_j = 25^\circ\text{C}$ unless otherwise specified)

■ Maximum Ratings

Symbol	Item	Ratings	Unit
		FRS400CA120	
V_{RRM}	Repetitive Peak Reverse Voltage	1200	V
$V_{R(\text{DC})}$	D.C. Reverse Voltage	960	V

Symbol	Item	Conditions	Ratings	Unit
$I_F(\text{AV})$	Forward Current	D.C. $T_c : 78^\circ\text{C}$	400	A
I_{FMS}	Surge Forward Current	$\frac{1}{2}$ cycle, 60Hz, peak value, non-repetitive	4000	A
I^2t	I^2t	Value for one cycle of surge current	66640	A^2s
T_j	Operating Junction Temperature		-40 to +150	$^\circ\text{C}$
T_{stg}	Storage Temperature		-40 to +125	$^\circ\text{C}$
V_{iso}	Isolation Breakdown Voltage (R.M.S.)	A.C. 1 minute	2500	V
Mounting Torque	Mounting (M6)	Recommended Value 2.5-3.9 (25-40)	4.7 (48)	$\text{N}\cdot\text{m}$ (kgf·cm)
	Terminal (M6)	Recommended Value 2.5-3.9 (25-40)	4.7 (48)	
Mass	Typical Value		460	g

■ Electrical Characteristics

Symbol	Item	Conditions	Ratings			Unit
			Min.	Typ.	Max.	
I_{RRM}	Repetitive Peak Reverse Current	$V_R = V_{RRM}, T_j = 150^\circ\text{C}$			20	mA
V_{FM}	Forward Voltage Drop	$I_F = 400\text{A}$, Inst. measurement			1.8	V
trr	Reverse Recovery Time	$I_F = 400\text{A}, -di/dt = 400\text{A}/\mu\text{s}$			400	ns
$R_{th(j-c)}$	Thermal Impedance	Junction to case			0.1	$^\circ\text{C}/\text{W}$

