



MACMIC

December 2009

PRELIMINARY

**MMD160S160B**

1600V 160A Rectifier Diode Module


RoHS Compliant

**PRODUCT FEATURES**

- Glass Passivated Chip
- Aluminum Oxide Ceramic Isolated Metal Baseplate
- Low Reverse Recovery Loss
- Low Forward Voltage
- High Surge Current Capability
- Low Inductance Package

**APPLICATIONS**

- Field Supply For DC Motors
- Line Rectifiers For Transistorized AC Motor Controllers
- Non-controllable Rectifiers For AC/DC Converter

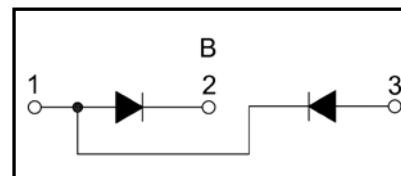**ABSOLUTE MAXIMUM RATINGS** $T_C=25^\circ\text{C}$  unless otherwise specified

| Symbol       | Parameter                            | Test Conditions  | Max.        | Unit                 |
|--------------|--------------------------------------|--|-------------|----------------------|
| $V_{RRM}$    | Repetitive Reverse Voltage           |  | 1600        | V                    |
| $I_{F(AV)}$  | Average Forward Current              | $T_C=85^\circ\text{C}$ Rectangular, $d=0.5$            | 160         | A                    |
| $I_{F(RMS)}$ | RMS Forward Current                  | $T_C=85^\circ\text{C}$ Rectangular, $d=0.5$            | 230         | A                    |
| $I_{FSM}$    | Non-Repetitive Surge Forward Current | $T_J=45^\circ\text{C}$ , $t=10\text{ms}$ , 50Hz, Sine  | 5000        | A                    |
|              |                                      | $T_J=45^\circ\text{C}$ , $t=8.3\text{ms}$ , 60Hz, Sine | 5500        | A                    |
| $I^2t$       | $I^2t$ (For Fusing)                  | $T_J=45^\circ\text{C}$ , $t=10\text{ms}$ , 50Hz, Sine  | 125000      | $\text{A}^2\text{s}$ |
|              |                                      | $T_J=45^\circ\text{C}$ , $t=8.3\text{ms}$ , 60Hz, Sine | 125500      | $\text{A}^2\text{s}$ |
| $P_D$        | Power Dissipation                    |  | 694         | W                    |
| $T_J$        | Junction Temperature                 |  | -40 to +150 | $^\circ\text{C}$     |
| $T_{STG}$    | Storage Temperature Range            |  | -40 to +125 | $^\circ\text{C}$     |
| $V_{isol}$   | Insulation Test Voltage              | AC, 50Hz, $t=1\text{min}$                              | 3000        | V                    |
| Weight       |                                      |  | 161         | g                    |

**ELECTRICAL AND THERMAL CHARACTERISTICS** $T_C=25^\circ\text{C}$  unless otherwise specified

| Symbol          | Parameter                        | Test Conditions                              | Min. | Typ. | Max. | Unit                      |
|-----------------|----------------------------------|--|------|------|------|---------------------------|
| $I_{RM}$        | Reverse Leakage Current          | $V_R=1600\text{V}$                           | --   | --   | 500  | $\mu\text{A}$             |
|                 |                                  | $V_R=1600\text{V}$ , $T_J=125^\circ\text{C}$ | --   | --   | 10   | mA                        |
| $V_F$           | Forward Voltage                  | $I_F=350\text{A}$                            | --   | 1.15 | 1.35 | V                         |
|                 |                                  | $I_F=350\text{A}$ , $T_J=125^\circ\text{C}$  | --   | 1.10 | --   | V                         |
| $V_{T0}$        | For power-loss calculations only |  |      |      | 0.8  | V                         |
| $r_T$           |                                  |  |      |      | 1.5  | $\text{m}\Omega$          |
| $R_{\theta JC}$ | Thermal Resistance               | Junction-to-Case                             | --   | --   | 0.18 | $^\circ\text{C}/\text{W}$ |

**MECHANICAL CHARACTERISTICS**

| Symbol | Parameter         | Test Conditions  | Min. | Typ. | Max. | Unit  |
|--------|-------------------|------------------|------|------|------|-------|
| Torque | Module-to-Sink    | Recommended (M6) | 3    |      | 5    | N · m |
| Torque | Module Electrodes | Recommended (M6) | 3    |      | 5    | N · m |

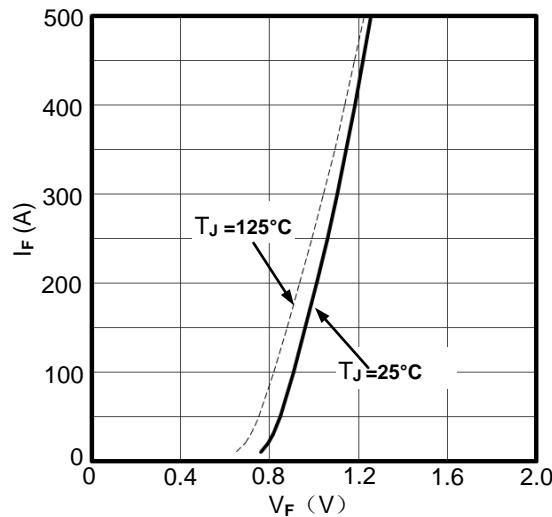


Figure1. Forward current vs.voltage drop per diode

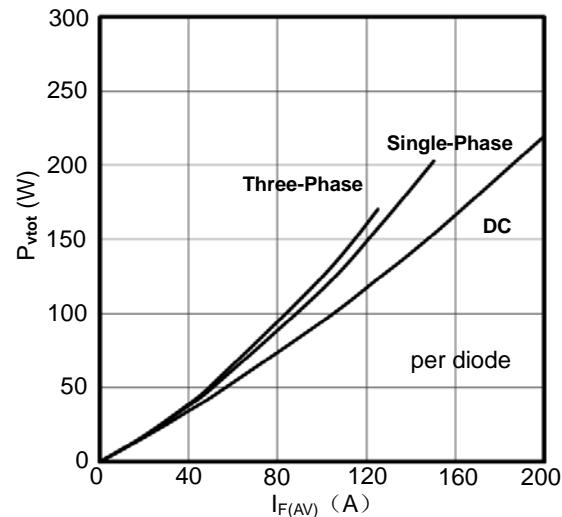


Figure2. Power dissipation vs. I<sub>F(AV)</sub>

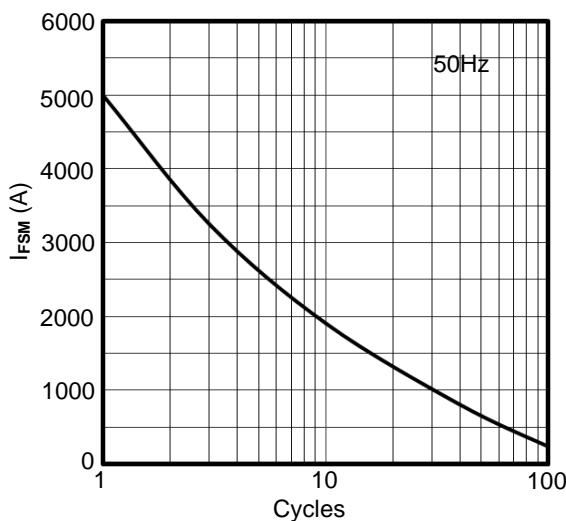


Figure3. Max Non-Repetitive Forward Surge Current


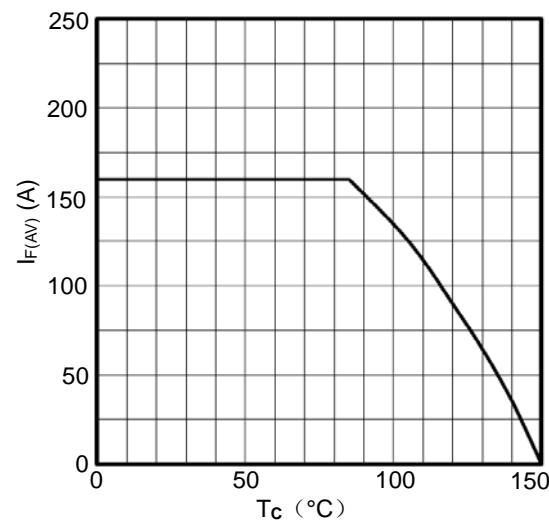


Figure4. Forward current vs.Case temperature



Rectangular Pulse Duration (seconds)  
Figure5. Transient Thermal Impedance

### Package Outline (Dimensions in mm)

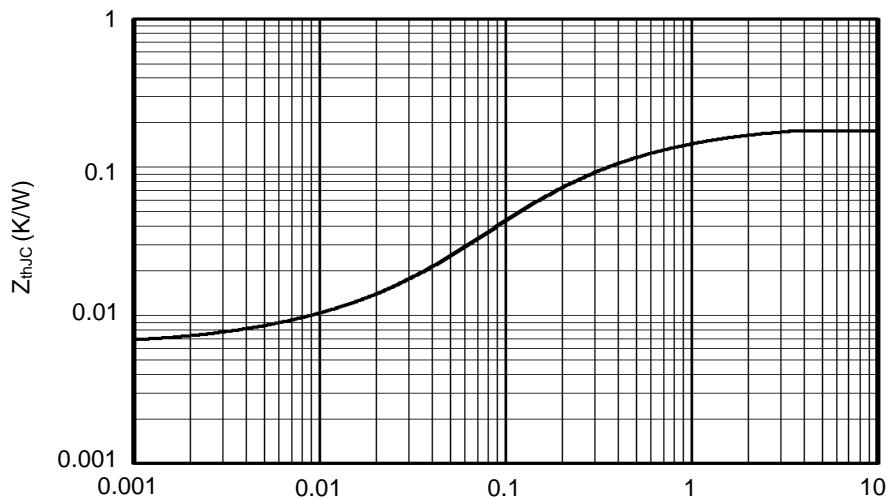