


# Fast Recovery Epitaxial Diode (FRED)


## DSEI 2x 101

**V<sub>RRM</sub>** = 1200 V  
**I<sub>FAVM</sub>** = 2x 91 A  
**t<sub>rr</sub>** = 40 ns

V <sub>RSM</sub>	V <sub>RRM</sub>	Type
V	V	
1200	1200	DSEI 2x 101-12A

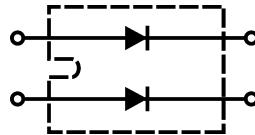

miniBLOC, SOT-227 B  
 E72873




Symbol	Test Conditions	Maximum Ratings (per diode)	
I <sub>F(RMS)</sub>	T <sub>VJ</sub> = T <sub>VJM</sub>	130	A
I <sub>F(AV)M</sub> ①	T <sub>C</sub> = 50°C; rectangular, d = 0.5	91	A
I <sub>FRM</sub>	t <sub>p</sub> < 10 µs; rep. rating, pulse width limited by T <sub>VJM</sub>	TBD	A
I <sub>FSM</sub>	T <sub>VJ</sub> = 45°C; t = 10 ms (50 Hz), sine	900	A
	t = 8.3 ms (60 Hz), sine	970	A
	T <sub>VJ</sub> = 150°C; t = 10 ms (50 Hz), sine	810	A
	t = 8.3 ms (60 Hz), sine	870	A
I <sup>2</sup> t	T <sub>VJ</sub> = 45°C t = 10 ms (50 Hz), sine	4100	A <sup>2</sup> s
	t = 8.3 ms (60 Hz), sine	4000	A <sup>2</sup> s
	T <sub>VJ</sub> = 150°C; t = 10 ms (50 Hz), sine	3300	A <sup>2</sup> s
	t = 8.3 ms (60 Hz), sine	3200	A <sup>2</sup> s
T <sub>VJ</sub>		-40...+150	°C
T <sub>VJM</sub>		150	°C
T <sub>stg</sub>		-40...+150	°C
P <sub>tot</sub>	T <sub>C</sub> = 25°C	250	W
V <sub>ISOL</sub>	50/60 Hz, RMS I <sub>ISOL</sub> ≤ 1 mA	2500	V~
M <sub>d</sub>	Mounting torque Terminal connection torque (M4)	1.5/13 1.5/13	Nm/lb.in. Nm/lb.in.
Weight		30	g

Symbol	Test Conditions	Characteristic Values (per diode)	
		typ.	max.
I <sub>R</sub>	T <sub>VJ</sub> = 25°C V <sub>R</sub> = V <sub>RRM</sub>	3	mA
	T <sub>VJ</sub> = 25°C V <sub>R</sub> = 0.8 • V <sub>RRM</sub>	1.5	mA
	T <sub>VJ</sub> = 125°C V <sub>R</sub> = 0.8 • V <sub>RRM</sub>	15	mA
V <sub>F</sub>	I <sub>F</sub> = 100 A; T <sub>VJ</sub> = 150°C	1.61	V
	T <sub>VJ</sub> = 25°C	1.87	V
V <sub>T0</sub>	For power-loss calculations only	1.01	V
r <sub>T</sub>		6.1	mΩ
R <sub>thJC</sub>		0.5	K/W
R <sub>thCH</sub>		0.05	K/W
t <sub>rr</sub>	I <sub>F</sub> = 1 A; -di/dt = 400 A/µs; V <sub>R</sub> = 30 V; T <sub>VJ</sub> = 25°C	40	60
			ns
I <sub>RM</sub>	V <sub>R</sub> = 100 V; I <sub>F</sub> = 75 A; -di <sub>F</sub> /dt = 200 A/µs L ≤ 0.05 mH; T <sub>VJ</sub> = 100°C	24	30
			A

① I<sub>FAVM</sub> rating includes reverse blocking losses at T<sub>VJM</sub>, V<sub>R</sub> = 0.8 V<sub>RRM</sub>, duty cycle d = 0.5  
Data according to IEC 60747

IXYS reserves the right to change limits, test conditions and dimensions

### miniBLOC, SOT-227 B

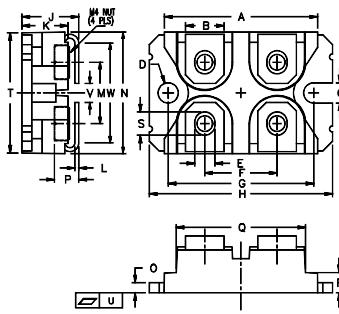

M4 screws (4x) supplied

Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	31.50	31.88	1.240	1.255
B	7.80	8.20	0.307	0.323
C	4.09	4.29	0.161	0.169
D	4.09	4.29	0.161	0.169
E	4.09	4.29	0.161	0.169
F	14.91	15.11	0.587	0.595
G	30.12	30.30	1.186	1.193
H	37.80	38.20	1.489	1.505
J	11.68	12.22	0.460	0.481
K	8.92	9.60	0.351	0.378
L	0.76	0.84	0.030	0.033
M	12.60	12.85	0.496	0.506
N	25.15	25.42	0.990	1.001
O	1.98	2.13	0.078	0.084
P	4.95	5.97	0.195	0.235
Q	26.54	26.90	1.045	1.059
R	3.94	4.42	0.155	0.174
S	4.72	4.85	0.186	0.191
T	24.59	25.07	0.968	0.987
U	-0.05	0.1	-0.002	0.004
V	3.30	4.57	0.130	0.180
W	0.780	0.830	19.81	21.08

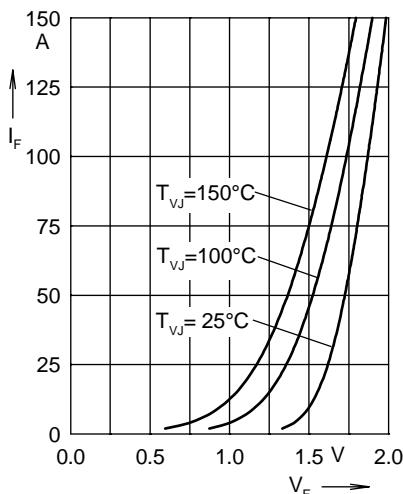


Fig. 1 Forward current  $I_F$  versus  $V_F$

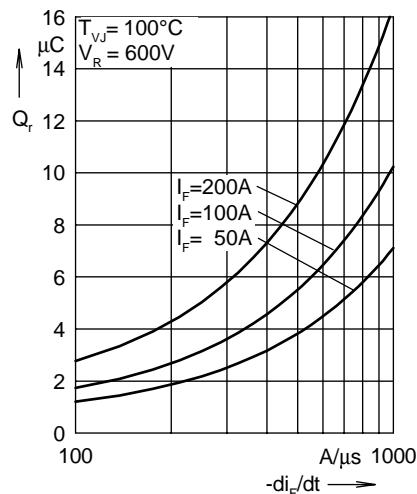


Fig. 2 Reverse recovery charge  $Q_r$  versus  $-di_F/dt$

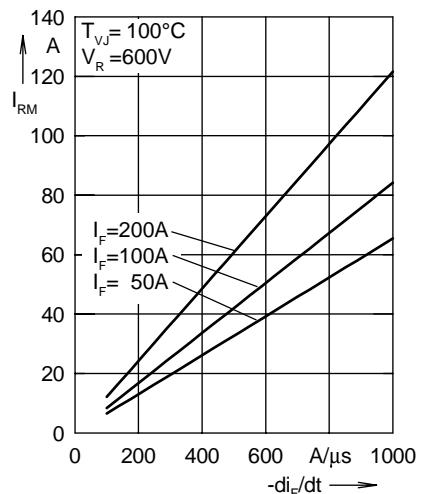


Fig. 3 Peak reverse current  $I_{RM}$  versus  $-di_F/dt$

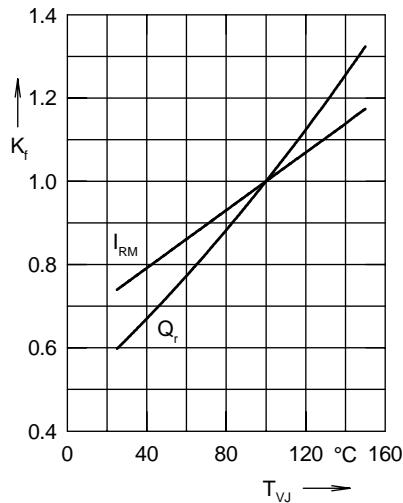


Fig. 4 Dynamic parameters  $Q_r$ ,  $I_{RM}$  versus  $T_{VJ}$

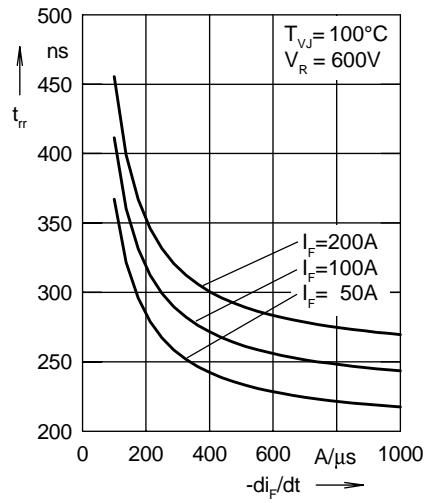


Fig. 5 Recovery time  $t_{rr}$  versus  $-di_F/dt$

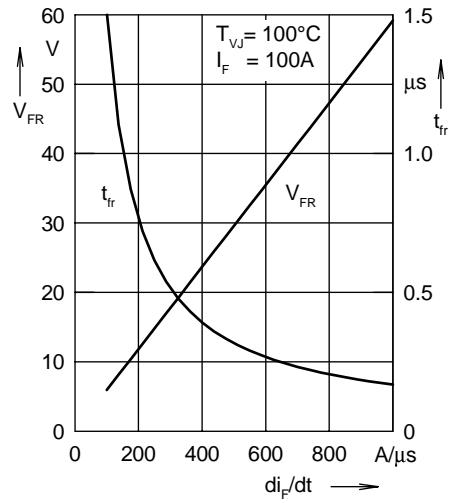


Fig. 6 Peak forward voltage  $V_{FR}$  and  $t_{rr}$  versus  $di_F/dt$

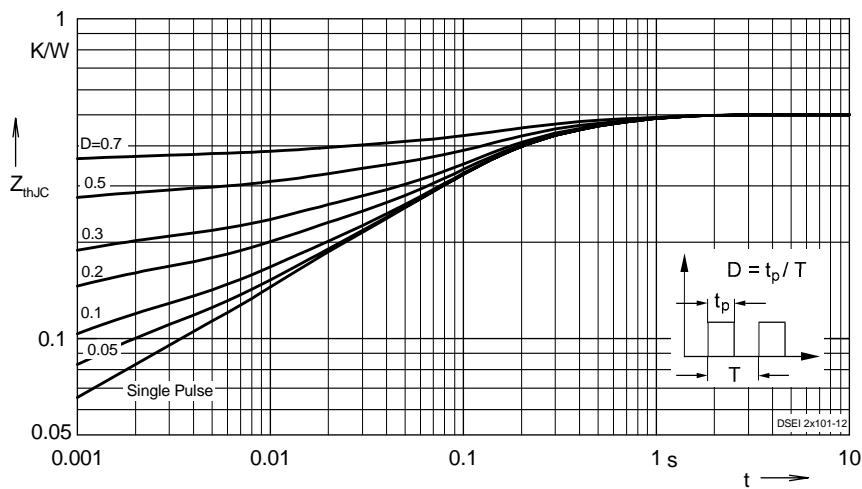


Fig. 7 Transient thermal impedance junction to case at various duty cycles

Constants for  $Z_{thJC}$  calculation:

i	$R_{thi}$ (K/W)	$t_i$ (s)
1	0.02	0.00002
2	0.05	0.00081
3	0.076	0.01
4	0.24	0.94
5	0.114	0.45