

THYRISTOR MODULE

PK(PD,PE,KK)130F



UL:E76102(M)

Power Thyristor/Diode Module **PK130F** series are designed for various rectifier circuits and power controls. For your circuit application, following internal connections and wide voltage ratings up to 1,600V are available. Two elements in a package and electrically isolated mounting base make your mechanical design easy.

- $I_{T(AV)}$ 130A, $I_{T(RMS)}$ 205A, I_{TSM} 4400A
- di/dt 200 A/ μ s
- dv/dt 500V/ μ s

(Applications)

Various rectifiers
AC/DC motor drives
Heater controls
Light dimmers
Static switches

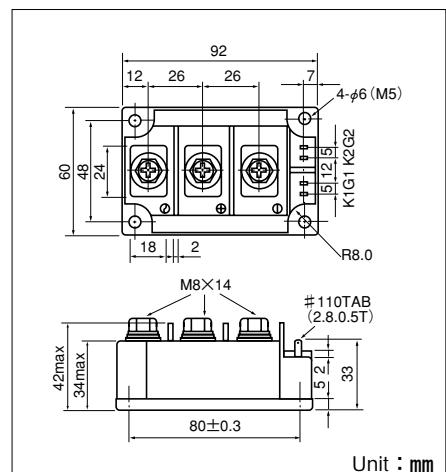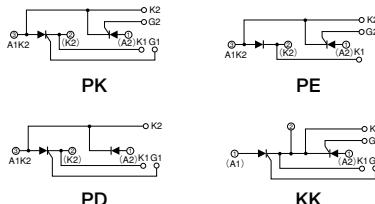

Unit : mm

■ Maximum Ratings

Symbol	Item	Ratings				Unit
		PK130F40 PD130F40 PE130F40 KK130F40	PK130F80 PD130F80 PE130F80 KK130F80	PK130F120 PD130F120 PE130F120 KK130F120	PK130F160 PD130F160 PE130F160 KK130F160	
V_{RRM}	* Repetitive Peak Reverse Voltage	400	800	1200	1600	V
V_{RSM}	* Non-Repetitive Peak Reverse Voltage	480	960	1300	1700	V
V_{DRM}	Repetitive Peak Off-State Voltage	400	800	1200	1600	V

Symbol	Item	Conditions	Ratings	Unit
$I_{T(AV)}$	* Average On-State Current	Single phase, half wave, 180° conduction, $T_c : 90^\circ\text{C}$	130	A
$I_{T(RMS)}$	* R.M.S. On-State Current	Single phase, half wave, 180° conduction, $T_c : 90^\circ\text{C}$	205	A
I_{TSM}	* Surge On-State Current	½cycle, 50Hz/60Hz, peak Value, non-repetitive	4000/4400	A
I^2t	* I^2t	Value for one cycle of surge current	8×10^4	A^2s
PGM	Peak Gate Power Dissipation		10	W
PG(av)	Average Gate Power Dissipation		3	W
IFGM	Peak Gate Current		3	A
VFGM	Peak Gate Voltage (Forward)		10	V
VRGM	Peak Gate Voltage (Reverse)		5	V
di/dt	Critical Rate of Rise of On-State Current	$I_G = 100\text{mA}, T_j = 25^\circ\text{C}, V_D = \frac{1}{2}V_{DRM}, dI_G/dt = 0.1\text{A}/\mu\text{s}$	200	$\text{A}/\mu\text{s}$
VISO	* Isolation Breakdown Voltage (R.M.S.)	A.C.1minute	2500	V
Tj	* Operating Junction Temperature		-40 to +125	$^\circ\text{C}$
Tstg	* Storage Temperature		-40 to +125	$^\circ\text{C}$
Mounting Torque	Mounting (M5)	Recommended 1.5-2.5 (15-25)	2.7 (28)	N·m
	Terminal (M8)	Recommended 8.8-10 (90-105)	11 (115)	(kgf·cm)
Mass			510	g

■ Electrical Characteristics

Symbol	Item	Conditions	Ratings	Unit
I_{DRM}	Repetitive Peak Off-State Current, max.	at V_{DRM} , single phase, half wave, $T_j = 125^\circ\text{C}$	50	mA
I_{RRM}	* Repetitive Peak Reverse Current, max.	at V_{DRM} , single phase, half wave, $T_j = 125^\circ\text{C}$	50	mA
V_{TM}	* Peak On-State Voltage, max.	On-State Current 400A, $T_j = 25^\circ\text{C}$ Inst. measurement	1.40	V
I_{GT}/V_{GT}	Gate Trigger Current/Voltage, max.	$T_j = 25^\circ\text{C}, I_t = 1\text{A}, V_D = 6\text{V}$	100/3	mA/V
V_{GD}	Non-Trigger Gate, Voltage. min.	$T_j = 125^\circ\text{C}, V_D = \frac{1}{2}V_{DRM}$	0.25	V
tgt	Turn On Time, max.	$I_t = 130\text{A}, I_G = 100\text{mA}, T_j = 25^\circ\text{C}, V_D = \frac{1}{2}V_{DRM}, dI_G/dt = 0.1\text{A}/\mu\text{s}$	10	μs
dv/dt	Critical Rate of Rise of Off-State Voltage, min.	$T_j = 125^\circ\text{C}, V_D = \frac{2}{3}V_{DRM}$, Exponential wave.	500	$\text{V}/\mu\text{s}$
I_H	Holding Current, typ.	$T_j = 25^\circ\text{C}$	50	mA
I_L	Latching Current, typ.	$T_j = 25^\circ\text{C}$	100	mA
$R_{th(j-c)}$	* Thermal Impedance, max.	Junction to case	0.2	$^\circ\text{C}/\text{W}$

* mark : Thyristor and Diode part. No mark : Thyristor part

