

DIM400GDM33-F032

Dual Switch IGBT Module

DS5969-2 September 2012 (LN29761)

Replaces DS5969-1

FEATURES

- 10µs Short Circuit Withstand
- High Thermal Cycling Capability
- Soft Punch Through Silicon
- Isolated AISiC Base with AIN Substrates
- 9.5kV Internal Isolation
- Lead Free construction

APPLICATIONS

- High Reliability Inverters
- Motor Controllers
- **Traction Drives**
- Choppers

The Powerline range of high power modules includes half bridge, chopper, dual, single and bi-directional switch configurations covering voltages from 1200V to 6500V and currents up to 2400A.

The DIM400GDM33-F032 is a single switch 3300V, nchannel enhancement mode, insulated gate bipolar transistor (IGBT) module. The IGBT has a wide reverse bias safe operating area (RBSOA) plus 10µs short circuit withstand. This device is optimised for traction drives and other applications requiring high thermal cycling capability.

The module incorporates an electrically isolated base plate and low inductance construction enabling circuit designers to optimise circuit layouts and utilise grounded heat sinks for safety.

ORDERING INFORMATION

Order As:

DIM400GDM33-F032

Note: When ordering, please use the complete part number

KEY PARAMETERS

V_{CES}		3300V
V _{CE(sat)}	* (typ)	2.8V
l _c ` ´	(max)	400A
I _{C(PK)}	(max)	800A

^{*} Measured at the auxiliary terminals




Fig. 1 Circuit configuration



Fig. 2 Package



ABSOLUTE MAXIMUM RATINGS

Stresses above those listed under 'Absolute Maximum Ratings' may cause permanent damage to the device. In extreme conditions, as with all semiconductors, this may include potentially hazardous rupture of the package. Appropriate safety precautions should always be followed. Exposure to Absolute Maximum Ratings may affect device reliability.

T_{case} = 25°C unless stated otherwise

Symbol	Parameter	Test Conditions	Max.	Units
V _{CES}	Collector-emitter voltage	V _{GE} = 0V	3300	V
V _{GES}	Gate-emitter voltage		±20	V
I _C	Continuous collector current	T _{case} = 90°C	400	Α
I _{C(PK)}	Peak collector current	1ms, T _{case} = 115°C	800	Α
P _{max}	Max. transistor power dissipation	$T_{case} = 25^{\circ}C, T_{j} = 150^{\circ}C$	5.2	kW
l ² t	Diode I ² t value	$V_R = 0, t_p = 10 \text{ms}, T_j = 125 ^{\circ}\text{C}$	80	kA ² s
V _{isol} *	Isolation voltage – per module	Commoned terminals to base plate. AC RMS, 1 min, 50Hz	9500	V
Q_{PD}	Partial discharge – per module	IEC1287, V ₁ = 6400V, V ₂ = 4700V, 50Hz RMS	10	рС

^{*} Package external clearances may not conform to all 9.5kV isolation standards.

Minimum external creepage/clearance distance between terminals and base plate is 33mm

THERMAL AND MECHANICAL RATINGS

Internal insulation material:

Baseplate material:

Creepage distance:

Clearance:

CTI (Comparative Tracking Index):

AIN

AISiC

20mm

350

Symbol	Parameter	Test Conditions	Min	Тур.	Max	Units
R _{th(j-c)}	Thermal resistance – transistor	Continuous dissipation - junction to case	-	-	24	°C/kW
R _{th(j-c)}	Thermal resistance – diode	Continuous dissipation - junction to case	-	-	48	°C/kW
R _{th(c-h)}	Thermal resistance – case to heatsink (per module)	Mounting torque 5Nm (with mounting grease)	-	ı	8	°C/kW
T _j	Junction temperature	Transistor	-	-	150	°C
		Diode	-	-	125	°C
T _{stg}	Storage temperature range	-	-40	-	125	°C
	Screw torque	Mounting – M6	-	-	5	Nm
		Electrical connections – M4	-	-	2	Nm
		Electrical connections – M8	-	-	10	Nm



ELECTRICAL CHARACTERISTICS

 T_{case} = 25°C unless stated otherwise.

Symbol	Parameter	Test Conditions	Min	Тур	Max	Units
	Collector cut-off current	$V_{GE} = 0V$, $V_{CE} = V_{CES}$			2	mA
I _{CES}		$V_{GE} = 0V$, $V_{CE} = V_{CES}$, $T_{case} = 125$ °C			30	mA
I _{GES}	Gate leakage current	$V_{GE} = \pm 20V, V_{CE} = 0V$			1	μA
$V_{GE(TH)}$	Gate threshold voltage	$I_C = 40$ mA, $V_{GE} = V_{CE}$	5.5	6.5	7.0	V
\ \ \ †	Collector-emitter	V _{GE} = 15V, I _C = 400A		2.8		V
V _{CE(sat)} †	saturation voltage	V _{GE} = 15V, I _C = 400A, T _j = 125°C		3.6		V
I _F	Diode forward current	DC		400		Α
I _{FM}	Diode maximum forward current	t _p = 1ms		800		Α
\	Diode forward voltage	I _F = 400A		2.9		V
V _F [†]		I _F = 400A, T _j = 125°C		3.0		V
C _{ies}	Input capacitance	$V_{CE} = 25V, V_{GE} = 0V, f = 1MHz$		72		nF
Qg	Gate charge	±15V		10		μC
C _{res}	Reverse transfer capacitance	$V_{CE} = 25V, V_{GE} = 0V, f = 1MHz$		1.1		nF
L _M	Module inductance			25		nΗ
R _{INT}	Internal transistor resistance			260		μΩ
SC _{Data}	Short circuit current, I _{SC}	$T_{j} = 125^{\circ}\text{C}, \ V_{CC} = 2500\text{V}$ $t_{p} \le 10\mu\text{s}, \ V_{GE} \le 15\text{V}$ $V_{CE \ (max)} = V_{CES} - L^{*} x \ dI/dt$ IEC 60747-9		1850		А

 $^{\ \ ^{+}}$ Measured at the power busbars, not the auxiliary terminals * L is the circuit inductance + L_{M}



ELECTRICAL CHARACTERISTICS

T_{case} = 25°C unless stated otherwise

Symbol	Parameter	Test Conditions	Min	Тур.	Max	Units
t _{d(off)}	Turn-off delay time	$I_{C} = 400A$ $V_{GE} = \pm 15V$		2100		ns
t _f	Fall time			210		ns
E _{OFF}	Turn-off energy loss	V _{CE} = 1800V		520		mJ
t _{d(on)}	Turn-on delay time	$R_{G(ON)} = 8.2 \Omega$ $R_{G(OFF)} = 5.6 \Omega$ $C_{ge} = 110 nF$ $L_S \sim 100 nH$		1130		ns
t _r	Rise time			245		ns
E _{ON}	Turn-on energy loss			620		mJ
Q_{rr}	Diode reverse recovery charge	$I_F = 400A$ $V_{CE} = 1800V$ $dI_F/dt = 2000A/\mu s$		160		μC
I _{rr}	Diode reverse recovery current			330		Α
E _{rec}	Diode reverse recovery energy			150		mJ

T_{case} = 125°C unless stated otherwise

Symbol	Parameter	Test Conditions	Min	Тур.	Max	Units
t _{d(off)}	Turn-off delay time	I _C = 400A		2150		ns
t _f	Fall time	$V_{GE} = \pm 15V$		220		ns
E _{OFF}	Turn-off energy loss	V _{CE} = 1800V		600		mJ
t _{d(on)}	Turn-on delay time	$R_{G(ON)} = 8.2 \Omega$ $R_{G(OFF)} = 5.6\Omega$ $C_{ge} = 110 nF$ $L_{S} \sim 100 nH$		1160		ns
t _r	Rise time			285		ns
E _{ON}	Turn-on energy loss			870		mJ
Q_{rr}	Diode reverse recovery charge	I _F = 400A		300		μC
I _{rr}	Diode reverse recovery current	V _{CE} = 1800V		400		Α
E _{rec}	Diode reverse recovery energy	$dI_F/dt = 2000A/\mu s$		300		mJ



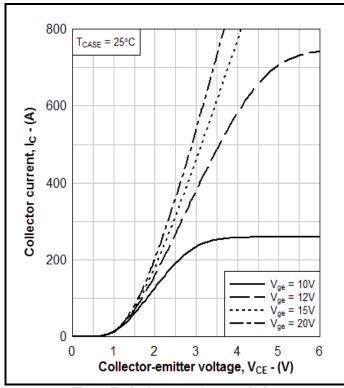


Fig. 3 Typical output characteristics

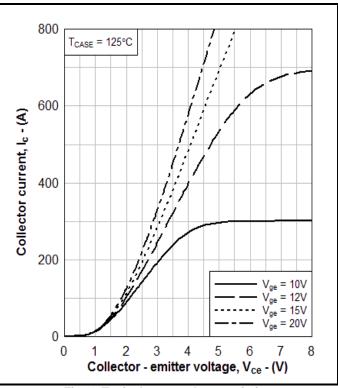


Fig. 4 Typical output characteristics

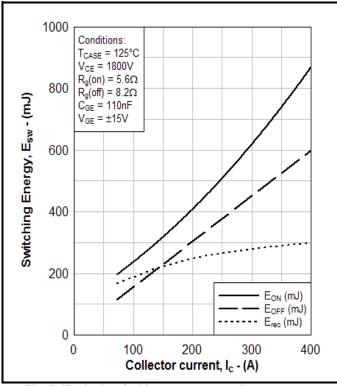


Fig. 5 Typical switching energy vs collector current

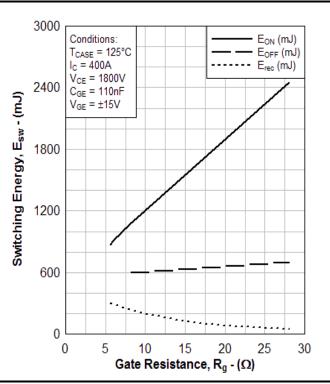


Fig. 6 Typical switching energy vs gate resistance



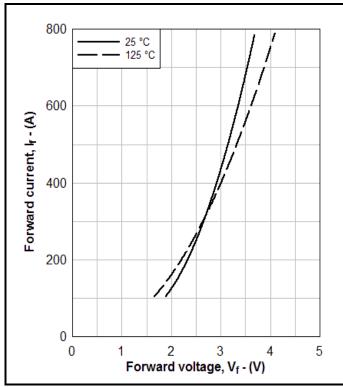


Fig. 7 Diode typical forward characteristics

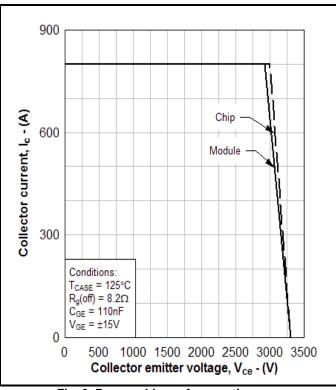


Fig. 8 Reverse bias safe operating area

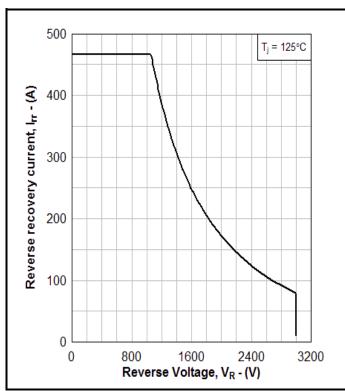


Fig. 9 Diode reverse bias safe operating area

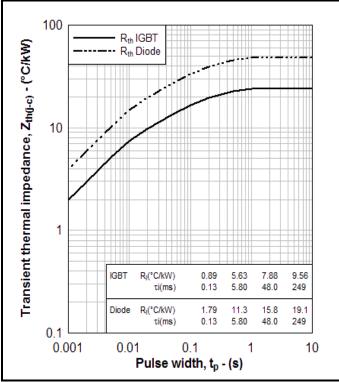


Fig. 10 Transient thermal impedance



PACKAGE DETAILS

For further package information, please visit our website or contact Customer Services. All dimensions in mm, unless stated otherwise.

DO NOT SCALE.

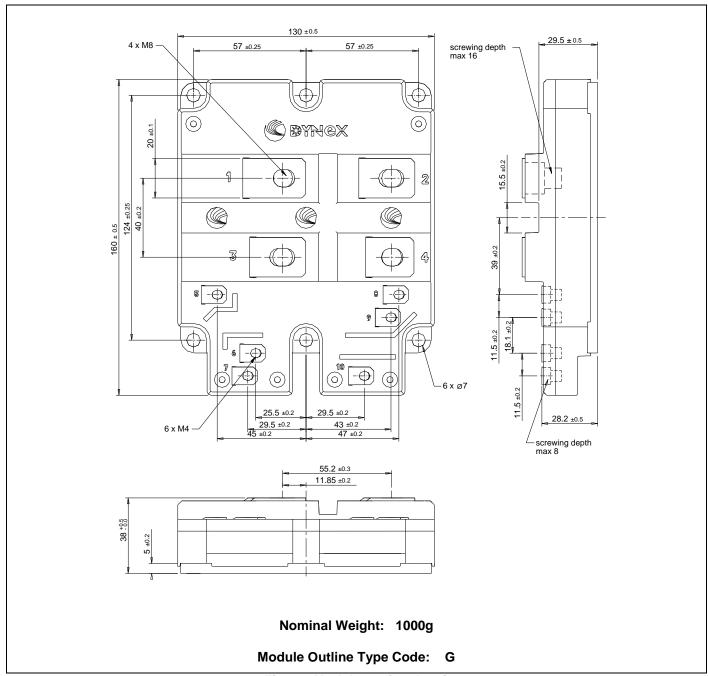


Fig. 11 Module outline drawing



IMPORTANT INFORMATION:

This publication is provided for information only and not for resale.

The products and information in this publication are intended for use by appropriately trained technical personnel.

Due to the diversity of product applications, the information contained herein is provided as a general guide only and does not constitute any guarantee of suitability for use in a specific application. The user must evaluate the suitability of the product and the completeness of the product data for the application. The user is responsible for product selection and ensuring all safety and any warning requirements are met. Should additional product information be needed please contact Customer Service.

Although we have endeavoured to carefully compile the information in this publication it may contain inaccuracies or typographical errors. The information is provided without any warranty or guarantee of any kind.

This publication is an uncontrolled document and is subject to change without notice. When referring to it please ensure that it is the most up to date version and has not been superseded.

The products are not intended for use in applications where a failure or malfunction may cause loss of life, injury or damage to property. The user must ensure that appropriate safety precautions are taken to prevent or mitigate the consequences of a product failure or malfunction.

The products must not be touched when operating because there is a danger of electrocution or severe burning. Always use protective safety equipment such as appropriate shields for the product and wear safety glasses. Even when disconnected any electric charge remaining in the product must be discharged and allowed to cool before safe handling using protective gloves.

Extended exposure to conditions outside the product ratings may affect reliability leading to premature product failure. Use outside the product ratings is likely to cause permanent damage to the product. In extreme conditions, as with all semiconductors, this may include potentially hazardous rupture, a large current to flow or high voltage arcing, resulting in fire or explosion. Appropriate application design and safety precautions should always be followed to protect persons and property.

Product Status & Product Ordering:

We annotate datasheets in the top right hand corner of the front page, to indicate product status if it is not yet fully approved for production. The annotations are as follows:-

Target Information: This is the most tentative form of information and represents a very preliminary specification.

No actual design work on the product has been started.

Preliminary Information: The product design is complete and final characterisation for volume production is in progress.

The datasheet represents the product as it is now understood but details may change.

No Annotation: The product has been approved for production and unless otherwise notified by Dynex any

product ordered will be supplied to the current version of the data sheet prevailing at the

time of our order acknowledgement.

All products and materials are sold and services provided subject to Dynex's conditions of sale, which are available on request.

Any brand names and product names used in this publication are trademarks, registered trademarks or trade names of their respective owners.

HEADQUARTERS OPERATIONS

DYNEX SEMICONDUCTOR LTD

Doddington Road, Lincoln, Lincolnshire, LN6 3LF, United Kingdom

Fax: +44(0)1522 500550 Tel: +44(0)1522 500500

Web: http://www.dynexsemi.com

CUSTOMER SERVICE

DYNEX SEMICONDUCTOR LTD

Doddington Road, Lincoln, Lincolnshire, LN6 3LF, United Kingdom

Fax: +44(0)1522 500020

Tel: +44(0)1522 502753 / 502901 Email: Power_solutions@dynexsemi.com

© Dynex Semiconductor Ltd. 2010. Technical Documentation - Not for resale.